
Pre-installation data sheet for baths and whirltubs

Index

Index	2
Important planning tips for bathtubs	3
Important planning tips for whirltubs	4
Maintenance openings	6
Data sheets for baths and whirltubs	11

Important planning tips for bathtubs

Installation location

- Check width of doors. Make sure that there will be no problems bringing the tub into the bathroom.
- There must not be any underfloor heating under the tub.
- The floor must be absolutely flat and horizontal.
- Install tubs **after** the tiles. (Top edge of finished floor)
- **Tolerances for acrylic:** As a result of the manufacturing process, deviations from the nominal dimensions may occur within the limits specified in the DIN 198 standard. Please take this into account in your planning.

Maintenance openings and air supply

Tiling the tub

- The following maintenance openings must be provided:
 - Drain and overflow fittings 200 x 200 mm
 - Control for coloured LED light/sound (optional) 200 x 200 mm maintenance opening at the foot end.
- Bathtub with coloured LED light: provide an opening in the panel for the air supply with an area of approximately 15 cm² (e.g. 3 x 5 cm or 2 x 7.5 cm).

Tub with removable panelling from Duravit

- It must be possible to remove the panelling for maintenance purposes. Your plans should therefore include clearance in front of the panelling.
- Provide for a gap of min. 2 mm between the floor and around the bathtub for the necessary air supply. This gap must remain unobstructed.

Tub with integrated/ seamless panel

- It must be possible to remove the tub for maintenance purposes. Your plans should therefore include clearance in front of the tub.
- Provide for a gap of min. 2 mm between the floor and around the bathtub for the necessary air supply. This gap must remain unobstructed.

Water installation

All work associated with the water connection may only be undertaken by a licensed plumber. The installation must be in accordance with country-specific standards and local regulations.

NOTICE

If the tray has a base inlet, a pipe interrupt must always be installed on-site. (DIN EN 1717)

> See installation diagram. (Page 4)

Water connection

- Connections for the water supply and drains must be in compliance with the currently valid standards and local regulations.
- Set coupling bush flush to mounting surface.

Electrical installation, bathtubs for coloured LED light/sound/white LED light under the edge of the tub



All work associated with the electrical connection may only be undertaken by a licensed electrician. The installation must comply with country-specific standards, local regulations and low-voltage guidelines.

Electrical data

Power supply

- Sound:
 - #791851 00 0 00 0000: 220-240V AC, 50/60Hz, 80W
- Coloured LED light with remote control for bathtubs
 - #790840 00 0 XX00: 110-240V AC, 50/60Hz, 30W
- Coloured LED light with remote control for Blue Moon bathtub
 - #790846 00 0 XX00: 110-240V AC, 50/60Hz, 60W
- White LED light under the edge of the tub
 - #791847 00 0 0000,
 - #791848 00 0 0000,
 - #791849 00 0 0000: 220-240V AC, 50/60Hz, 50W

Circuit breaker

I_N = 16 A


RCCB

I_{ΔN} ≤ 30 mA

Pre-installation

- > Lay a fixed feed cable for power supply:
 - install separate circuit breaker and residual-current circuit breaker (RCCB) upstream
 - connect all pole disconnector mains switch upstream located outside specified protection zones (0 - 2)
 - leave 3000 mm of feed cable exposed
- > Lay equipotential bonding cables:
 - leave 3000 mm of cable exposed

Protection zones

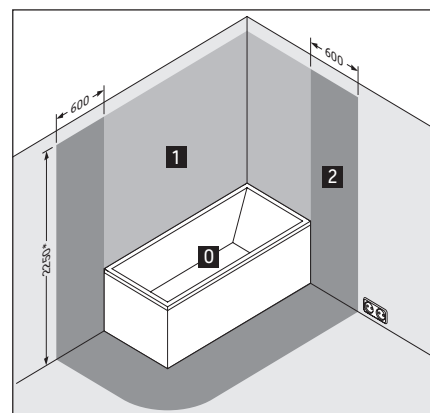

* or the height of the highest fixed-location shower head/water outlet, whichever is higher

Important planning tips for whirltubs

Transport

- > Wear suitable protective clothing.
 - > Keep the tub only at the marked points. Not at the whirlsystem.
 - > Avoid collisions.
- Improper transport could cause leaks.

Installation location

- Check width of doors. Make sure that there will be no problems bringing the tub into the bathroom.
- There must not be any underfloor heating under the tub.
- The floor must be absolutely flat and horizontal.
- Install tubs **after** the tiles. (Top edge of finished floor)
- Depending on the combination of tub and whirltub system it is possible that system components may protrude beyond the edge of the tub. We therefore recommend installation in a supporting frame.
- **Tolerances for bathtubs:** As a result of the manufacturing process, deviations from the nominal dimensions may occur within the limits specified in the DIN 198 standard. Please take this into account in your planning.

Maintenance openings and air supply

NOTICE

Due to the improved revision possibility installation is recommended with a removable panel.

Tiling the tub

- The following maintenance openings must be provided:
 - Drain and overflow fittings 200 x 200 mm
 - Equipment 500 x 500 mm (Nahho: 250 x 400 mm)
 - For locations, please see the section on "Maintenance openings".
- Provide an opening in the panel for the air supply with an effective area of approximately 15 cm² (e.g. 3 x 5 cm or 2 x 7.5 cm).

Tub with removable panelling from Duravit

- It must be possible to remove the panelling for maintenance purposes. Your plans should therefore include clearance in front of the panelling.
- For the air supply is an opening pre-installed in the panel or is to provide a gap of min. 2 mm between the floor and around the bathtub. This opening must remain unobstructed.

Tub with integrated/ seamless panel

- It must be possible to remove the tub for maintenance purposes. Your plans should therefore include clearance in front of the tub.
- For the air supply is an opening pre-installed in the panel or is to provide a gap of min. 2 mm between the floor and around the bathtub. This opening must remain unobstructed.


Water installation

All work associated with the water connection may only be undertaken by a licensed plumber. The installation must be in accordance with country-specific standards and local regulations.

NOTICE

If the tray has a base inlet, a pipe interrupt must always be installed on-site. (DIN EN 1717)

> See installation diagram.

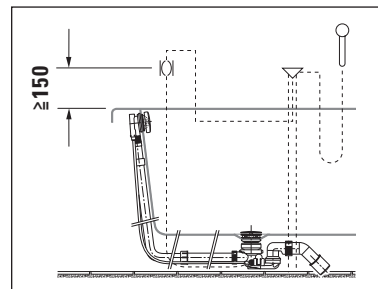

Water connection

- Connections for the water supply and drains must be in compliance with the currently valid standards and local regulations.
- Set coupling bush flush to mounting surface.

Electrical installation for whirltubs

 All work associated with the electrical connection may only be undertaken by a licensed electrician. The installation must comply with country-specific standards, local regulations and low-voltage guidelines.

Electrical data

Whirl system	Rated power with standard equipment	Max. rated power, fully-equipped
Air-System (# 760XXX XX X AS 10XX)	0.76 kW	0.85 kW
Air-System Cape Cod (# 760XXX XX X AS 10XX)	0,70 kW	0,74 kW
Jet Project (# 760XXX XX X JP 10XX)	0,66 kW	0,66 kW
Jet-System (# 760XXX XX X JS 10XX)	0.59 kW	0.67 kW
Combi-System P (# 760XXX XX X CP 10XX)	1.89 kW	1.98 kW
Combi-System E (# 760XXX XX X CE 10XX)	1.91 kW	2.96 kW
Combi-System L (# 760XXX XX X CL 10XX)	1,59 kW	2,64 kW
Jet-System E (# 760XXX XX X JE 10XX)	1.14 kW	2.20 kW
Durapearl-System (# 760XXX XX X DP 10XX)	1.22 kW	1.26 kW

Power supply

76XXXX XX X XX 1XX0: 220-240V AC, 50Hz

76XXXX XX X XX 1XX6: 220-240V AC, 60Hz


Circuit breaker $I_N = 16 \text{ A}$

RCCB $I_{\Delta N} \leq 30 \text{ mA}$

Pre-installation

- > Lay a fixed feed cable for power supply:
 - install separate circuit breaker and residual-current circuit breaker (RCCB) upstream
 - connect all pole disconnector mains switch upstream located outside specified protection zones (0 - 2)
 - leave 3000 mm of feed cable exposed
- > Lay equipotential bonding cables:
 - leave 3000 mm of cable exposed

Protection zones

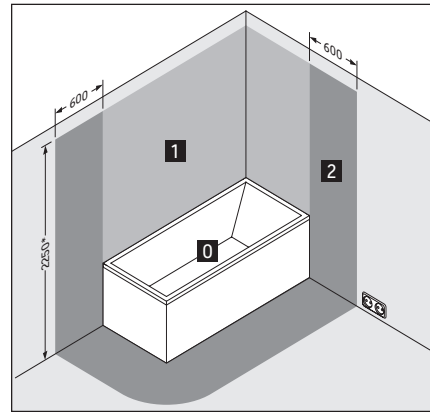

* or the height of the highest fixed-location shower head/water outlet, whichever is higher

Maintenance openings


Revisability

The whirltub should be installed that way, that all important components (pump, blower and control panel) are still accessible. When an whirltub is equipped with a panel, this should be accessible and removable.

Locations of the whirltub system components


The illustrations show the standard configuration for the components of the whirl system* with the location of the operating unit. The back massage is located at the head end (depending on the whirl system). Custom-made designs available on request. In such cases we will require a drawing showing the desired layout. Duravit will confirm whether the desired layout can be implemented.

2x3




760023, # 760024


2nd floor




760074, # 760075



760076, # 760160, # 760161




760079, # 760080




760081, # 760162, # 760163

Blue Moon




760143




760402


Cape Cod




760330



760362




760363




760364


Darling New




760238, # 760240, # 760242




760239, # 760241, # 760243




760244, # 760245



760246




760247




760248

* Please note that depending on the combination of tub and whirltub system it is possible that system components may protrude beyond the edge of the tub. We therefore recommend installation in a supporting frame / Air-System, Air-System Cape Cod, Jet Project, Jet-System, Combi-System P, Combi-System E, Combi-System L, Jet-System E and Durapearl-System: 76...

Daro




760027, # 760141




760028


D-Code




760095, # 760096,
760098, # 760100




760097, # 760099



760101

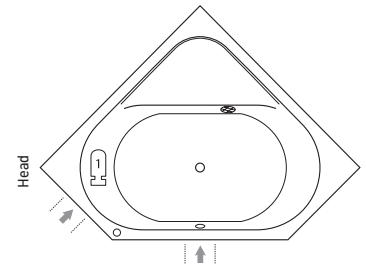


760137




760138


DuraStyle



760292, # 760294, # 760296




760293, # 760295, # 760297




760298, # 760299


Happy D.2




760308, # 760310, # 760312




760309, # 760311, # 760313




760314, # 760315




760316




760317



760318




760319




760320


Nahho



760285




760286

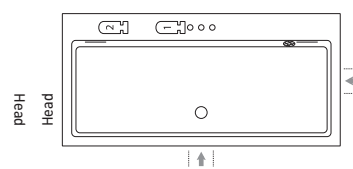


760280


P3 Comforts




760371, # 760373, # 760375




760372, # 760374, # 760376

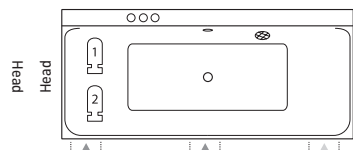


760377, # 760378



760379




760380




760381


Paiova




760212, # 760218
760214, # 760220
760216, # 760222




760213, # 760219
760215, # 760221
760217, # 760223

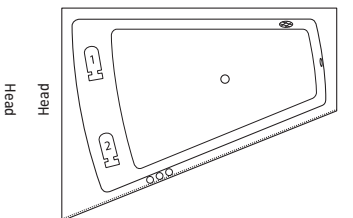


760264, # 760266, # 760268




760265, # 760267, # 760269




760270




760271




760390, # 760392



760391, # 760393

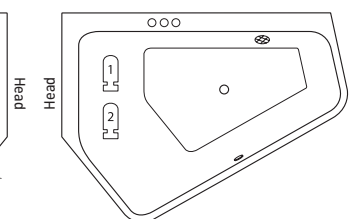


760394, # 760396




760395, # 760397

Air-System, Air-System Cape Cod, Jet Project, Jet-System, Combi-System P, Combi-System E, Combi-System L, Jet-System E and Durapearl-System: 76...


PuraVida




760181




760198



760182, # 760183

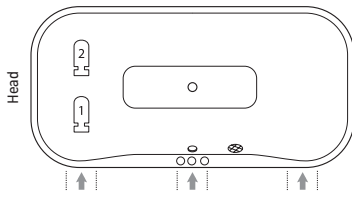


760184

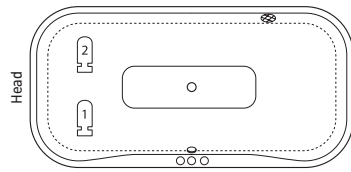


760185


Starck




760050, # 760333, # 760334,
760335, # 760336, # 760337




760052, # 760338, # 760339,
760340, # 760341




760009



760010




760011




760012


Vero



760133




760134




760135, # 760136

Sundeck

With panel



760066, # 760128



760127

Positioning of the control panel on the pillar:

Panel for freestanding version, corner right and back-to-wall version:

The figures show the standard configuration of the whirlsystem with the positioning of the control panel (see Fig.). At the head side are the back jets (depending on the whirlsystem). Custom version on request. Please send us a sketch showing the desired layout. Duravit will check and wherever possible confirm the feasibility.


Panel for corner left:

The figures show the standard configuration of the whirlsystem with the positioning of the control panel (see Fig.). At the head side are the back jets (depending on the whirlsystem). Custom version on request. Please send us a sketch showing the desired layout. Duravit will check and wherever possible confirm the feasibility.


Drill holes for taps on the pillar:

On request, drill holes can be made at the factory for base plates for rim-mounted tap fittings. Please state the desired base plate when ordering. Duravit can supply a list of suitable pre-punched sets on request.

With rail-mount system



760065, # 760126




760125


Positioning of the control panel on tiled rim:

The figures show the standard configuration of the whirlsystem with the positioning of the control panel, placed in the middle of the front tiled rim. The pull button to operate the waste is always on the same side as the control panel (see Fig.). At the head side are the back jets (depending on the whirlsystem).

Custom version on request (see Fig.). Please make a note when ordering.



760065, # 760126



760125

Legend

Unit 1	Unit 2*	Operating unit**	Intake opening	Pull knob	Tap module	Required maintenance openings	Required maintenance openings***


* Only Combi-Systems / ** The number of operating elements is based on the whirltub system and the additional modules selected / *** Only necessary for Combi-System E/L in combination with sound and/or coloured LED light / Air-System, Air-System Cape Cod, Jet Project, Jet-System, Combi-System P, Combi-System E, Combi-System L, Jet-System E and Durapearl-System: 76...

Data sheets for baths and whirltubs


Pre-installation Sundeck with support # 700065

1855 x 855 x 460


Design by E00S

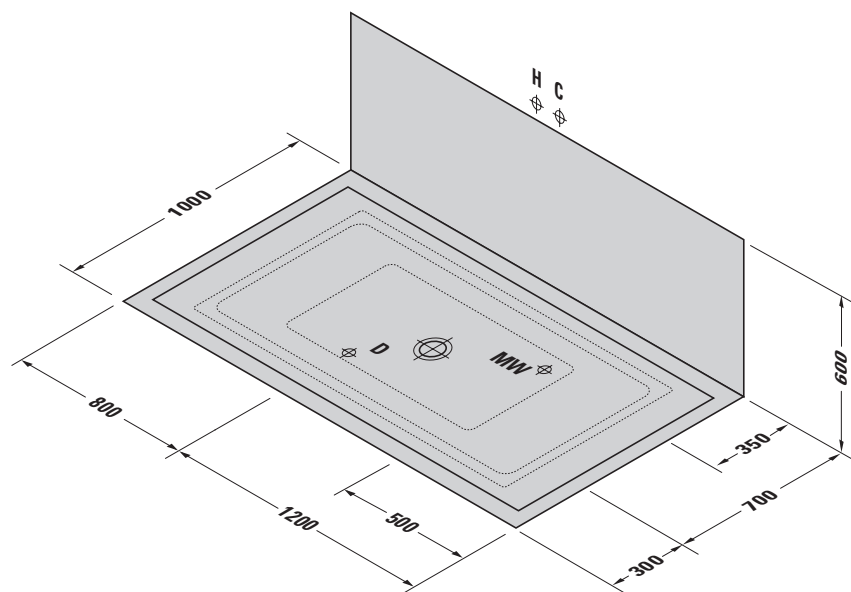

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with base inlet



Siphon for bathtub # 700065



Siphon with base inlet for bathtub # 700065


	Height	including support
Bathtub	480	~ 600

Technical specifications


Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
59,8	182	101,8	202 x 105 x 73	3/4"		700065 . . 0 00 0000

Pre-installation Sundeck with rail-mount system # 700065/760065 ⌋ 1855 x 855 x 460 ⌋


Design by E00S

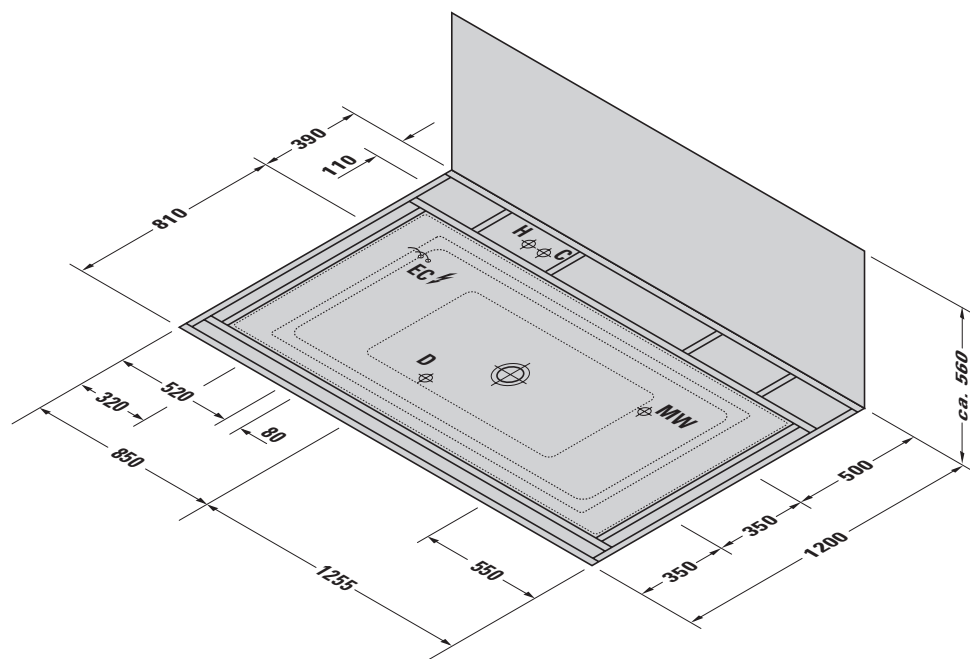


- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for waste and overflow with base inlet
- EC Electricity connection




Siphon for bathtub # 700065



Siphon with base inlet for bathtub # 700065



Siphon for whirltub # 760065



Siphon with base inlet for whirltub # 760065

	Height	including rail-mount system
Bathtub	480	ca. 560
whirltub	480	ca. 560


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
92,8	157	139,5	202 x 105 x 129	3/4"		700065 . . 0 00 0000
100,0	160	146,7	202 x 105 x 129	3/4"	Air-System	760065 00 0 AS 1000
103,0	161	149,7	202 x 105 x 129	3/4"	Jet-System	760065 00 0 JS 1000
109,0	163	155,7	202 x 105 x 129	3/4"	Combi P	760065 00 0 CP 1000
122,0 - 128,0	169 - 171	168,7 - 174,7	202 x 105 x 129	3/4"	Combi E	760065 00 0 CE 1000
129,0 - 134,0	171 - 173	175,7 - 180,7	202 x 105 x 129	3/4"	Combi L	760065 00 0 CL 1000


Pre-installation Sundeck with support # 700125

└ 1855 x 855 x 460 ┘


Design by E00S

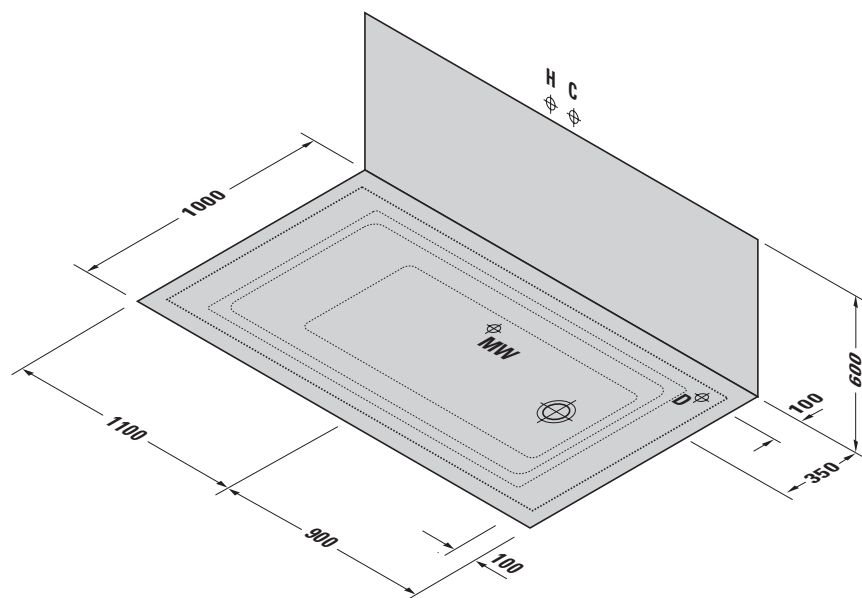

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with base inlet



Siphon for bathtub # 700125



Siphon with base inlet for bathtub # 700125


	Height	including support
Bathtub	480	~ 600

Technical specifications


Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
59,8	217	101,8	202 x 105 x 73	3/4"		700125 . . 0 00 0000

Pre-installation Sundeck with rail-mount system # 700125/760125 ⌋ 1855 x 855 x 460 ⌋


Design by E00S

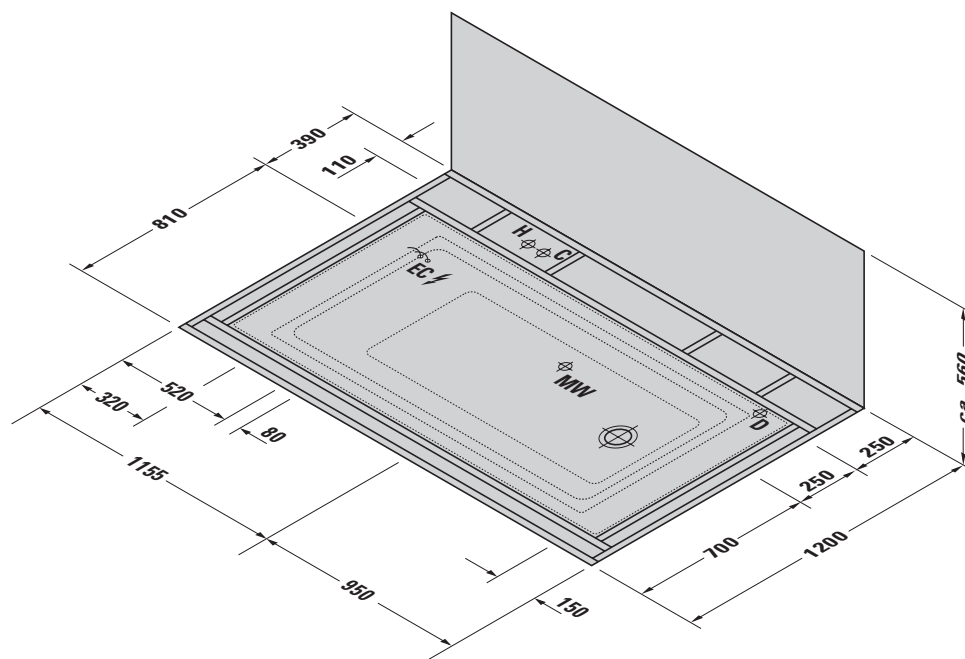


- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for waste and overflow with base inlet
- EC Electricity connection




Siphon for bathtub # 700125



Siphon with base inlet for bathtub # 700125



Siphon for whirltub # 760125



Siphon with base inlet for whirltub # 760125

	Height	including rail-mount system
Bathtub	480	ca. 560
whirltub	480	ca. 560


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
92,8	185	139,5	202 x 105 x 129	3/4"		700125 . . 0 00 0000
100,0	188	146,7	202 x 105 x 129	3/4"	Air-System	760125 00 0 AS 1000
103,0	189	149,7	202 x 105 x 129	3/4"	Jet-System	760125 00 0 JS 1000
109,0	192	155,7	202 x 105 x 129	3/4"	Combi P	760125 00 0 CP 1000
122,0 - 128,0	197 - 199	168,7 - 174,7	202 x 105 x 129	3/4"	Combi E	760125 00 0 CE 1000
129,0 - 134,0	200 - 202	175,7 - 180,7	202 x 105 x 129	3/4"	Combi L	760125 00 0 CL 1000


Pre-installation Sundeck with support # 700126

↳ 2055 x 855 x 460 ›


Design by E00S

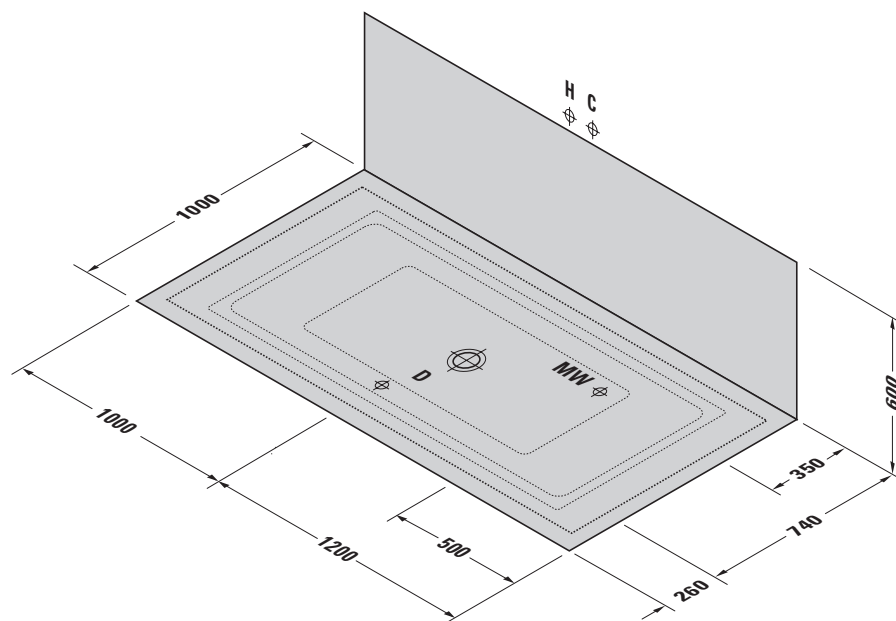

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with base inlet



Siphon for bathtub # 700126



Siphon with base inlet for bathtub # 700126


	Height	including support
Bathtub	480	~ 600

Technical specifications


Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
73,0	217	115,0	228 x 109 x 73	3/4"		700126 . . 0 00 0000

Pre-installation Sundeck with rail-mount system # 700126/760126 ⌋ 2055 x 855 x 460 ⌋


Design by E00S

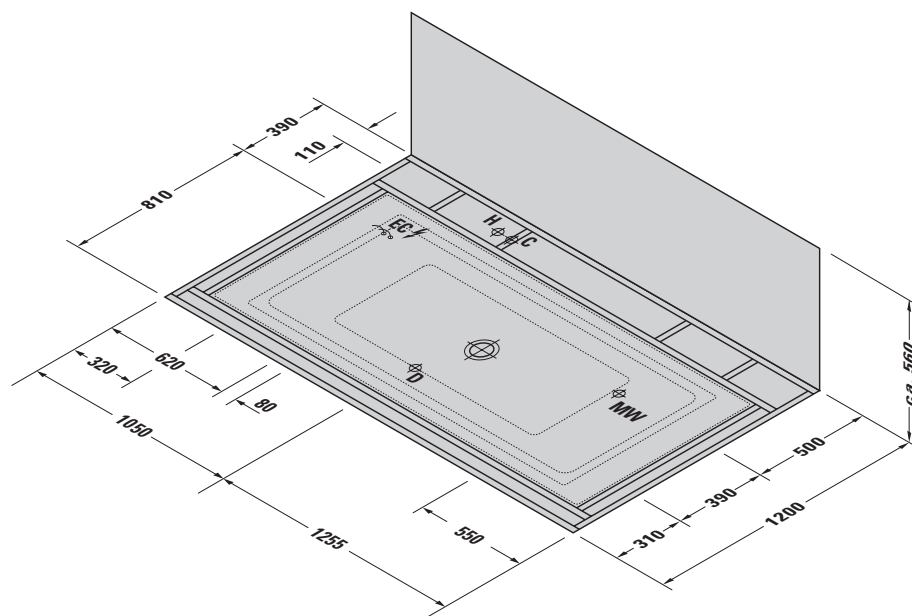


H Warmwasseranschluss
C Kaltwasseranschluss
D Abflussanschluss
MW Mischwasseranschluss bei
Ab- und Überlaufgarnitur
mit Bodenzulauf
EC ⚡ Stromanschluss




Siphon for bathtub # 700126



Siphon with base inlet for bathtub # 700126



Siphon for whirltub # 760126



Siphon with base inlet for whirltub # 760126

	Height	including rail-mount system
Bathtub	480	ca. 560
whirltub	480	ca. 560


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
104,8	184	151,5	228 x 109 x 129	3/4"		700126 . . 0 00 0000
112,0	187	158,7	228 x 109 x 129	3/4"	Air-System	760126 00 0 AS 1000
115,0	188	161,7	228 x 109 x 129	3/4"	Jet-System	760126 00 0 JS 1000
121,0	190	167,7	228 x 109 x 129	3/4"	Combi P	760126 00 0 CP 1000
134,0 - 140,0	195 - 197	180,7 - 186,7	228 x 109 x 129	3/4"	Combi E	760126 00 0 CE 1000
141,0 - 146,0	197 - 199	187,7 - 192,7	228 x 109 x 129	3/4"	Combi L	760126 00 0 CL 1000


Pre-installation Sundeck with furniture panel # 700066

1855 x 855 x 460


Design by E00S

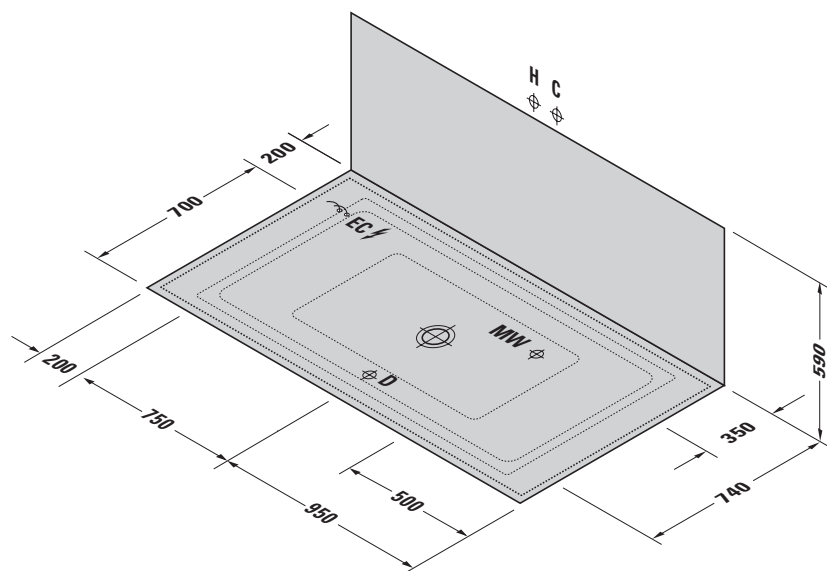

- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for waste and overflow with base inlet
- EC Electricity connection



Siphon for bathtub # 700066



Siphon with base inlet for bathtub # 700066


Technical specifications

Net weight	Floor load	Shipping weight	Shipping dimensions	Water inlet	Whirlsystem	Model-No.
kg	kg/m ²	kg	l x w x h (cm)	OD		
95,0	233	137,0	202 x 105 x 73	3/4"		700066 . . 0 00 0000



Pre-installation Sundeck with furniture panel # 700066/760066

1855 x 855 x 460


Design by E00S

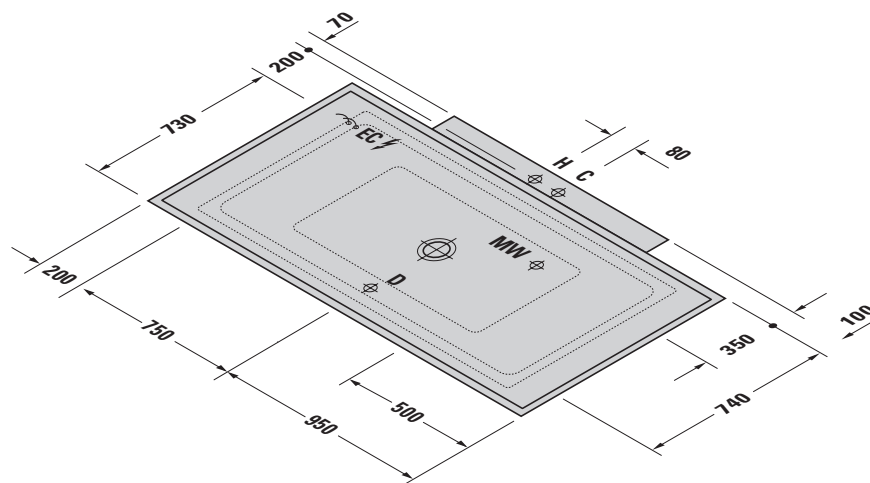


- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for waste and overflow with base inlet
- EC Electricity connection




Siphon for bathtub # 700066



Siphon with base inlet for bathtub # 700066



Siphon for whirltub # 760066



Siphon with base inlet for whirltub # 760066


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
110,0	218	152,0	202 x 105 x 73	3/4"		700066 . . 0 00 0000
117,0	222	159,0	202 x 105 x 73	3/4"	Air-System	760066 00 0 AS 1000
120,0	223	162,0	202 x 105 x 73	3/4"	Jet-System	760066 00 0 JS 1000
126,0	226	168,0	202 x 105 x 73	3/4"	Combi P	760066 00 0 CP 1000
139,0 - 145,0	233 - 236	181,0 - 187,0	202 x 105 x 73	3/4"	Combi E	760066 00 0 CE 1000
146,0 - 151,0	237 - 239	188,0 - 193,0	202 x 105 x 73	3/4"	Combi L	760066 00 0 CL 1000



Pre-installation Sundeck with furniture panel # 700066/760066

1855 x 855 x 460


Design by E00S

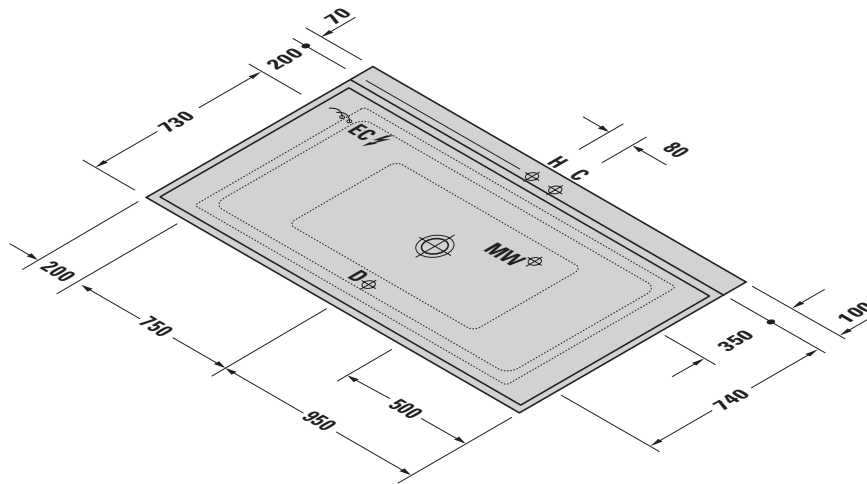


- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for waste and overflow with base inlet
- EC Electricity connection

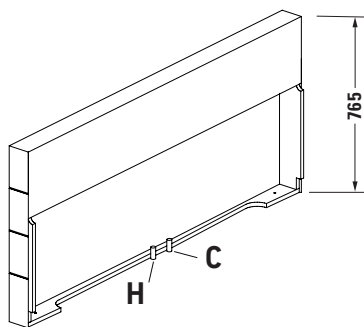


Siphon for bathtub # 700066



Siphon with base inlet for bathtub # 700066



Siphon for whirltub # 760066



Siphon with base inlet for whirltub # 760066




Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
117,0	222	159,0	202 x 105 x 73	3/4"		700066 . . 0 00 0000
124,0	225	166,0	202 x 105 x 73	3/4"	Air-System	760066 00 0 AS 1000
127,0	227	169,0	202 x 105 x 73	3/4"	Jet-System	760066 00 0 JS 1000
133,0	230	175,0	202 x 105 x 73	3/4"	Combi P	760066 00 0 CP 1000
146,0 - 152,0	237 - 240	188,0 - 194,0	202 x 105 x 73	3/4"	Combi E	760066 00 0 CE 1000
153,0 - 158,0	241 - 243	195,0 - 200,0	202 x 105 x 73	3/4"	Combi L	760066 00 0 CL 1000


Pre-installation Sundeck with furniture panel # 700127/760127

1855 x 855 x 460


Design by E00S

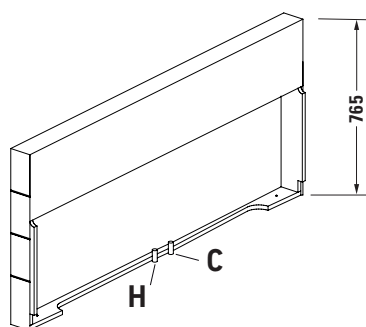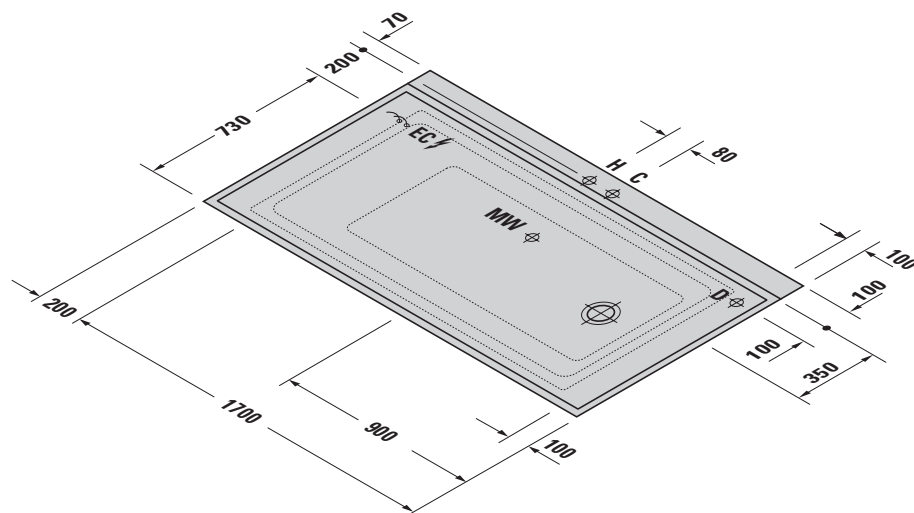


Siphon for bathtub # 700127



Siphon with base inlet for bathtub # 700127



Siphon for whirltub # 760127



Siphon with base inlet for whirltub # 760127


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
117,0	259	159,0	202 x 105 x 73	3/4"		700127 . . 0 00 0000
124,0	263	166,0	202 x 105 x 73	3/4"	Air-System	760127 00 0 AS 1000
127,0	264	169,0	202 x 105 x 73	3/4"	Jet-System	760127 00 0 JS 1000
133,0	267	175,0	202 x 105 x 73	3/4"	Combi P	760127 00 0 CP 1000
146,0 - 152,0	274 - 277	188,0 - 194,0	202 x 105 x 73	3/4"	Combi E	760127 00 0 CE 1000
153,0 - 158,0	278 - 281	195,0 - 200,0	202 x 105 x 73	3/4"	Combi L	760127 00 0 CL 1000


Pre-installation Sundeck with furniture panel # 700128

└ 2055 x 855 x 460 ┘


Design by E00S

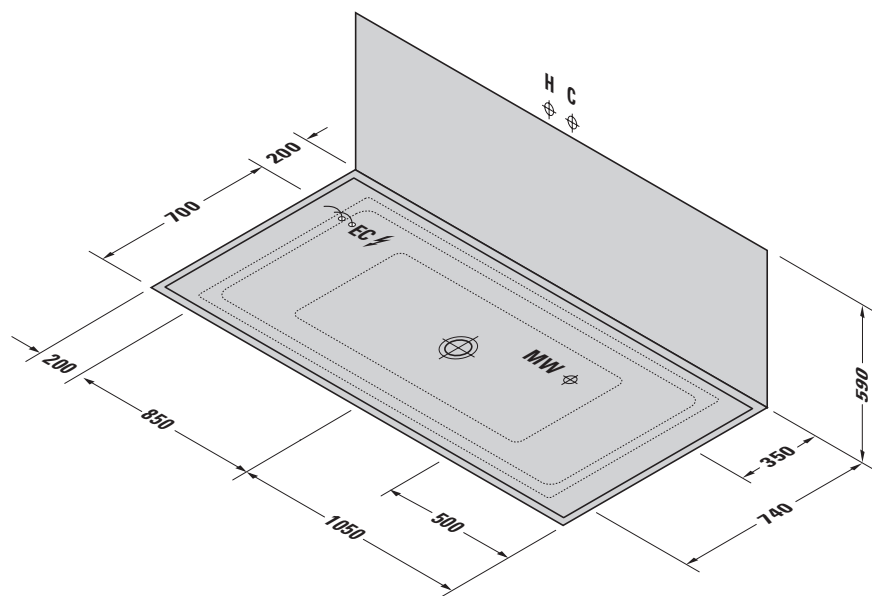

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection



Siphon for bathtub # 700128



Siphon with base inlet for bathtub # 700128


Technical specifications

Net weight	Floor load	Shipping weight	Shipping dimensions	Water inlet	Whirlsystem	Model-No.
kg	kg/m ²	kg	l x w x h (cm)	OD		
105,0	270	147,0	228 x 109 x 73	3/4"		700128 . . 0 00 0000



Pre-installation Sundeck with furniture panel # 700128/760128

✂ 2055 x 855 x 460 ✂


Design by E00S

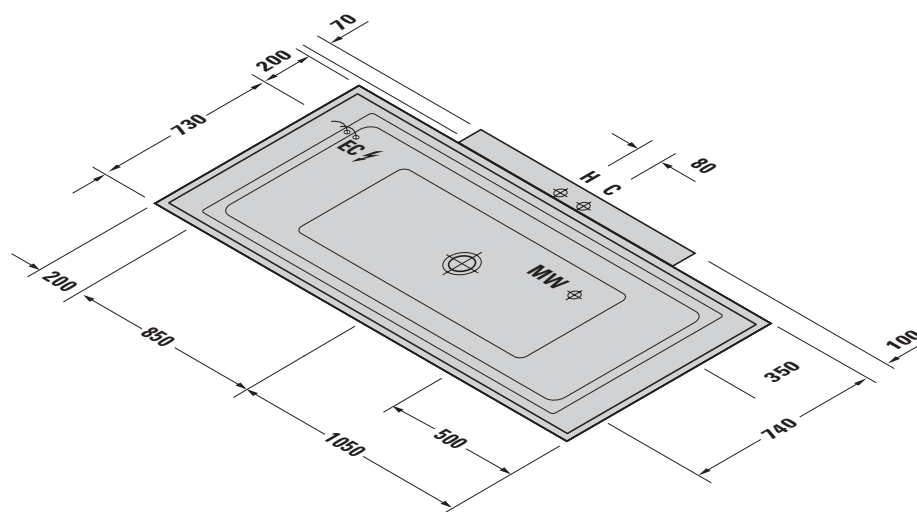


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection




Siphon for bathtub # 700128



Siphon with base inlet for bathtub # 700128



Siphon for whirltub # 760128



Siphon with base inlet for whirltub # 760128


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
120,0	250	164,0	228 x 109 x 73	3/4"		700128 . . 0 00 0000
127,0	253	171,0	228 x 109 x 73	3/4"	Air-System	760128 00 0 AS 1000
130,0	255	174,0	228 x 109 x 73	3/4"	Jet-System	760128 00 0 JS 1000
136,0	258	180,0	228 x 109 x 73	3/4"	Combi P	760128 00 0 CP 1000
149,0 - 155,0	264 - 267	193,0 - 199,0	228 x 109 x 73	3/4"	Combi E	760128 00 0 CE 1000
156,0 - 161,0	267 - 270	200,0 - 205,0	228 x 109 x 73	3/4"	Combi L	760128 00 0 CL 1000



Pre-installation Sundeck with furniture panel # 700128/760128

✂ 2055 x 855 x 460 ✂


Design by E00S

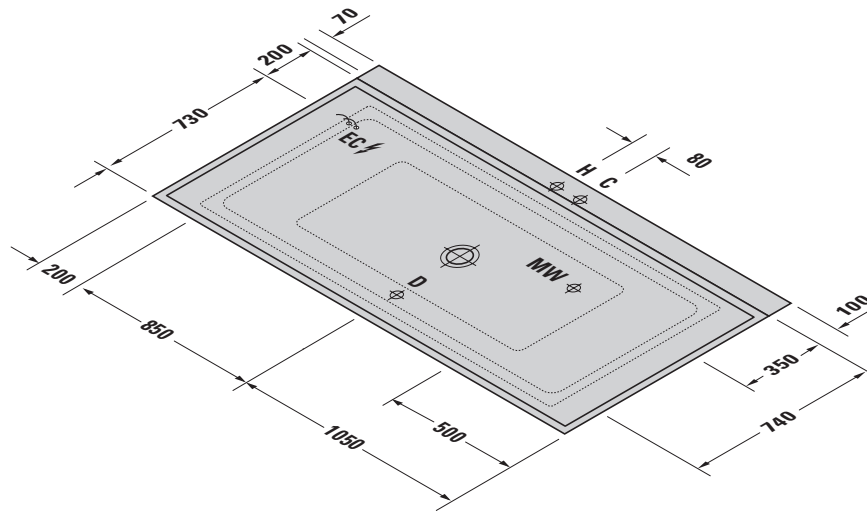


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection

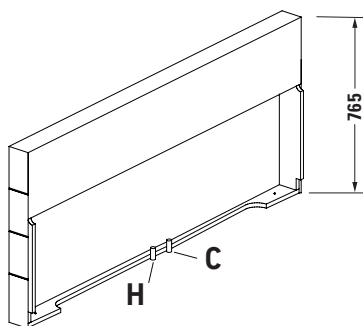


Siphon for bathtub # 700128



Siphon with base inlet for bathtub # 700128



Siphon for whirltub # 760128



Siphon with base inlet for whirltub # 760128


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
127,0	253	171,0	228 x 109 x 73	3/4"		700128 . . 0 00 0000
134,0	257	178,0	228 x 109 x 73	3/4"	Air-System	760128 00 0 AS 1000
137,0	258	181,0	228 x 109 x 73	3/4"	Jet-System	760128 00 0 JS 1000
143,0	261	187,0	228 x 109 x 73	3/4"	Combi P	760128 00 0 CP 1000
156,0 - 162,0	267 - 270	200,0 - 206,0	228 x 109 x 73	3/4"	Combi E	760128 00 0 CE 1000
163,0 - 168,0	270 - 273	207,0 - 212,0	228 x 109 x 73	3/4"	Combi L	760128 00 0 CL 1000


Pre-installation Sundeck with support # 700196

↳ 2055 x 1270 x 470 ›


Design by E00S

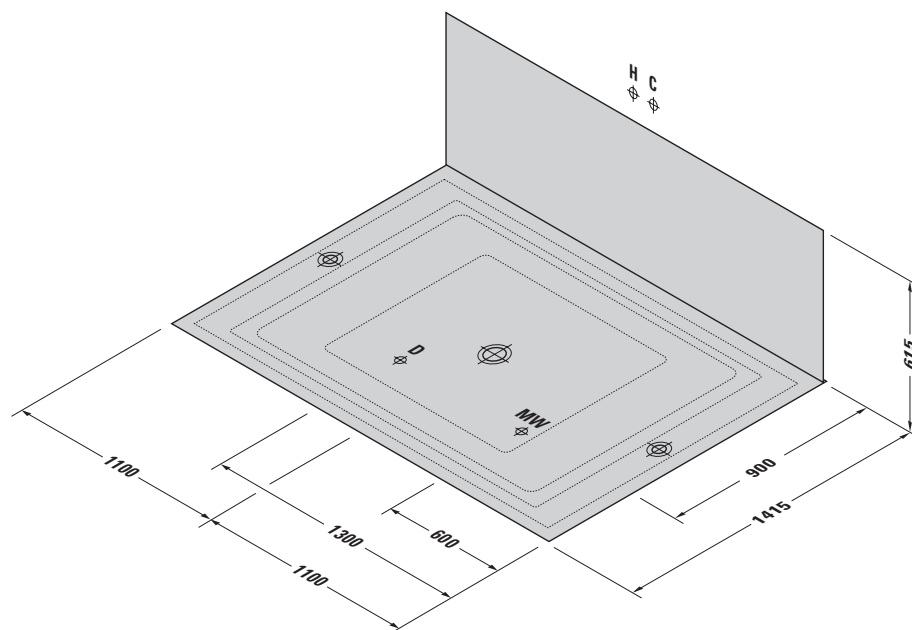

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with base inlet



Siphon for bathtub # 700196



Siphon with base inlet for bathtub # 700196

	Height	including support
Bathtub	490	~ 615


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
89,0	206	119,0	220 x 140 x 66	3/4"		700196 . . 0 00 0000


Pre-installation Sundeck with furniture panel # 700197

↳ 2055 x 1270 x 470 ›


Design by E00S

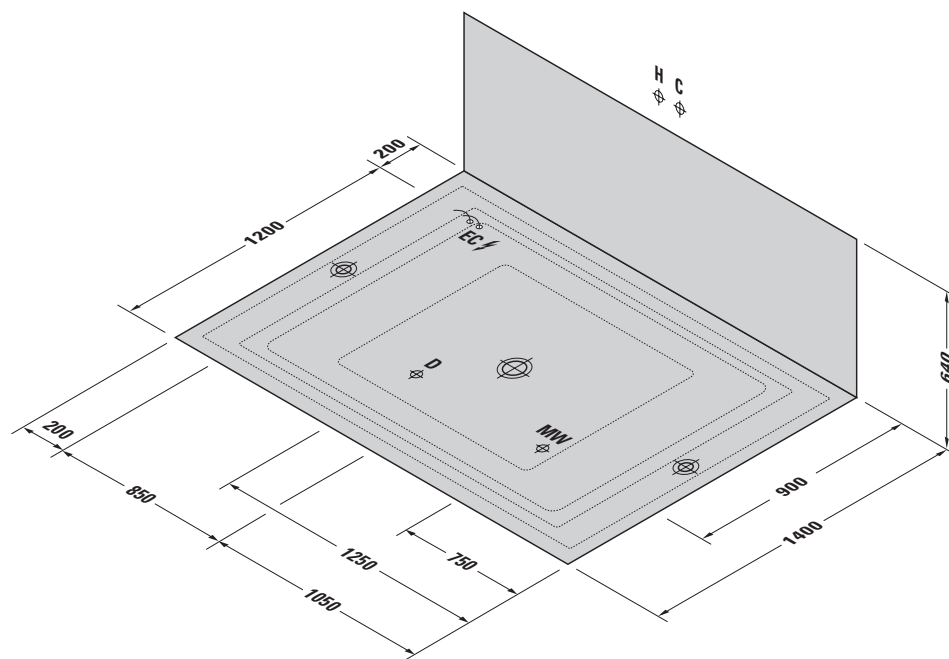

- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for waste and overflow with base inlet
- EC Electricity connection



Siphon for bathtub # 700197



Siphon with base inlet for bathtub # 700197

	Height	including panel
Bathtub	490	640

Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD	Whirlsystem	Model-No.
132,0	233	162,0	220 x 140 x 66	3/4"		700197 . . 0 00 0000

Duravit AG
P.O. Box 240
Werderstr. 36
78132 Hornberg
Germany
Phone +49 78 33 70 0
Fax +49 78 33 70 289
info@duravit.com
www.duravit.com

